

SKYE SOLUTIONS QUARRY PUMPS

AVAILABLE MOUNTING CONFIGURATIONS

MP SERIES FRAME MOUNT WITH IRON LINER


OPERATING LEVELS	CHROME IRON	
MIN FLOW	280 GPM	64 m3/h
MAX FLOW	2250 GPM	511 m3/h
DISCHARGE SIZE	4"	100 mm
SUCTION SIZE	6"	150 mm
SOLIDS HANDLING	1.7"	43 mm
MAX SPEED	1800 RPM	1800 RPM
SHUT-OFF HEAD	285'	87 m
BEP HEAD	225'	69 m
BEP FLOW	1775 GPM	403 m3/h
BEP	68%	68%

PARTS	STANDARD MATERIAL (CHROME IRON)
IMPELLER	Chrome Iron
VOLUTE LINERS	Chrome Iron
VOLUTE CASING	Ductile Iron



Performances shown are for 3.0, 1.0
60°F water, flange mounted configuration
with Cydopost®. Other mounting styles
or 3.0 may require curve adjustments.

Frame	Max HP	Liner	Speed	Impeller Dia.	Style	Volute	Solids Dia.	N _s	Suction	Discharge	No. Vanes
D	80	METAL	VARIOUS	14.4"	ENCLOSED	SINGLE	1.7"	1300	6"	4"	5
E	160										

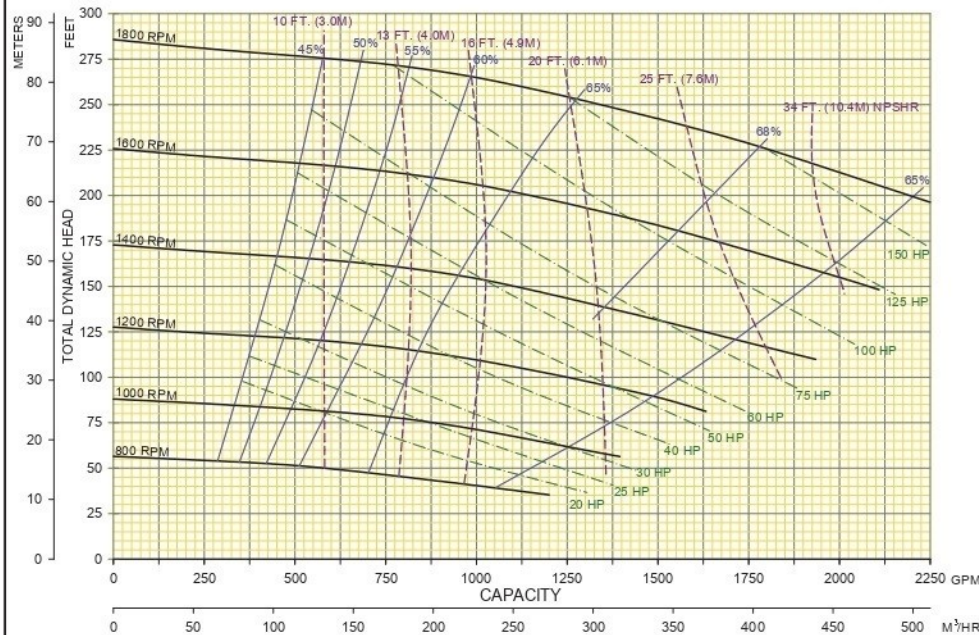

01	06/27/14	CTG	MODEL . MP-SER	CURVENC
00	12/16/13	GH	TYPE : SLURRY PUMP	MP SERIES